



MicroD 21 Position Receptacle, 24 awg pigtails
 CCT PN 760-01936-00
 Glenair PN MWDM2L-21S-4K1-36B

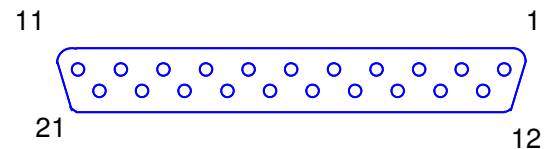

Mating face of MicroD 21 position receptacle (J1)

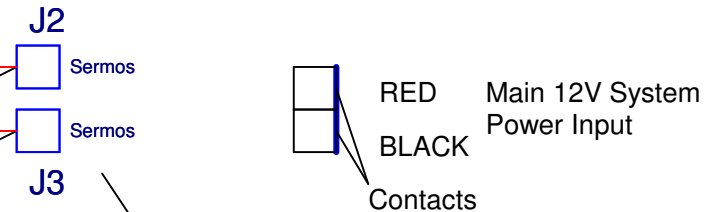

Crimp both wires into Sermos contact (2 plcs)

Notes:

- 1) Attach J2 and J3 together (mechanism is part of connectors) with contacts oriented as shown.
- 2) Place label on wire 1" from end of wire with the corresponding connector name (i.e. Serial Port)
- 3) Add label over expando-sleeving with "Gimbal LT Interface Cable", CCT Part Number, and Rev.

Connector Info:

- J2 - Anderson Power Products
Conn PN - 1327
Contact PN - 1332
- J3 - Anderson Power Products
Conn PN - 1327G6
Contact PN - 1332
- J4 - AMP
Conn PN - 205203-3
Socket PN - 66683-4
Hood PN - 5-748676-1

Cloud Cap Technology		
Title Cable, Interface, TASE100		
Size B	Document Number 500-02009-00	Rev A02
Date: Tuesday, June 09, 2009	Sheet 1	of 1