

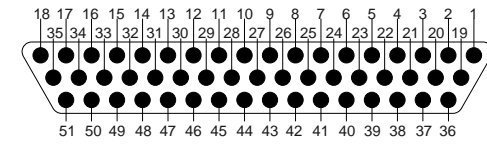


ECO #	REV.	DESCRIPTION	DATE	BY
367	A01	Initial Release	08/26/2011	RS
375	B01	Moved label. Changed expando sleeving and length of extra wires	09/16/2011	RS

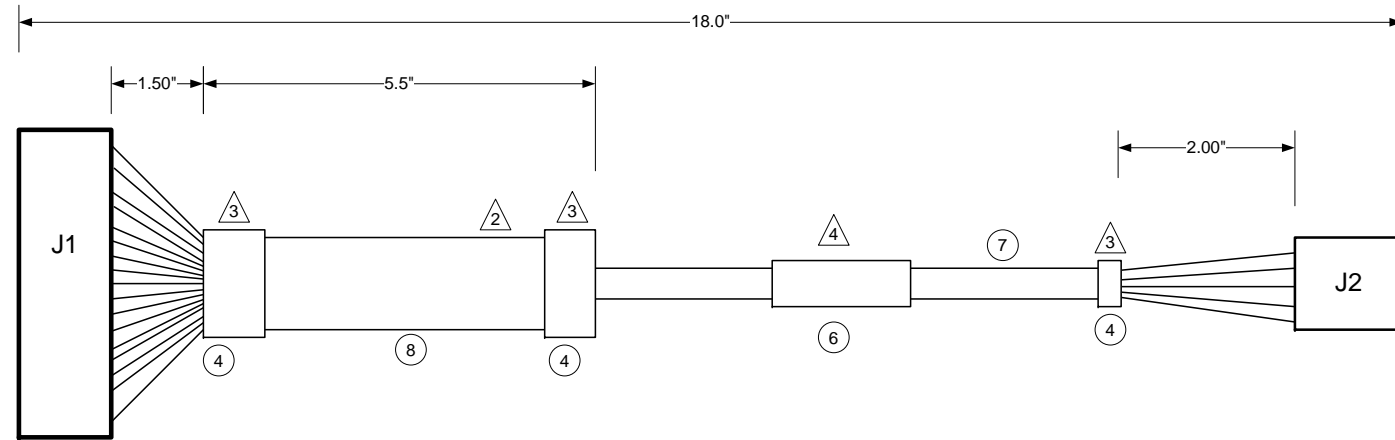

MicroD 51 Position Sockets

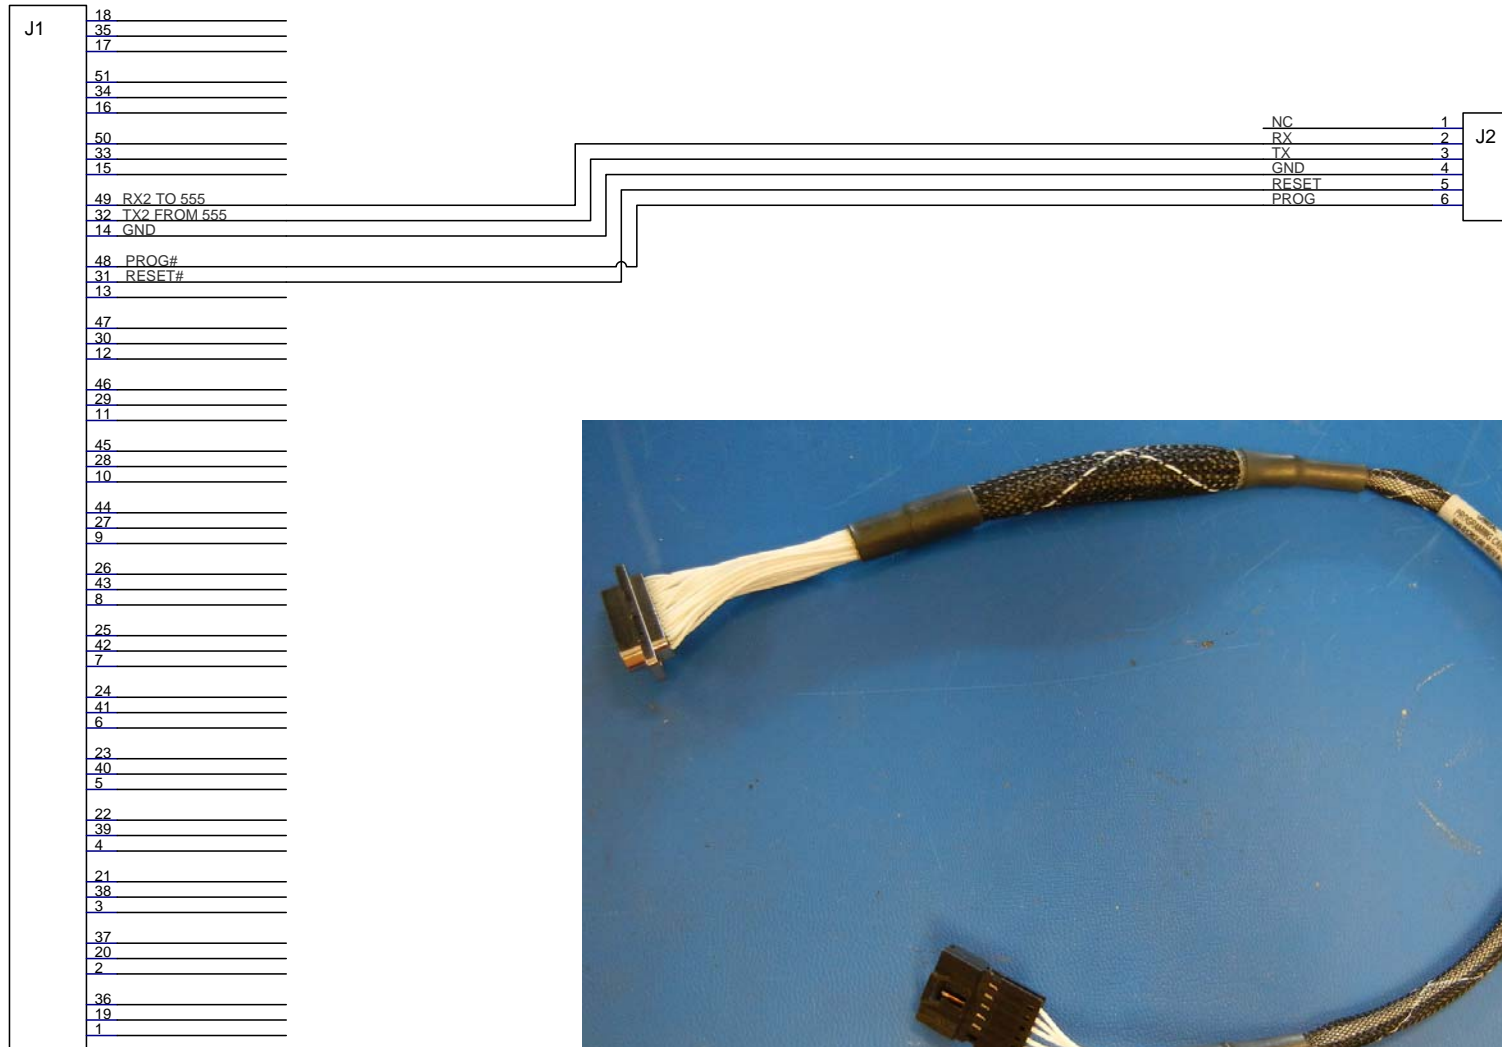

NOTES:

- 1 Bag completed cables individually and label bags with CCT part number, revision and date of manufacture: 500-03165-00 REV B01 MM/YYYY.
- 2 Cut off unused pigtails, approximately 5.50", and cover all ends with the same piece of heat shrink tubing. Cover all wires with expando-sleeving.
- 3 Cover ends of expando-sleeving with adhesive heat shrink tubing.
- 4 Add label over expando-sleeving with: TASE 51 Position Programming Cable, 500-03165-00 Rev B01.

ITEM	PART NUMBER	DESCRIPTION	QTY.
8	GRP110NF12BK	ALPHA Wire 1/2" Expando-sleeving or equivalent	AR
7	GRP110NF14BK	ALPHA Wire 3/4" Expando-sleeving or equivalent	AR
6	PTL-19-427	Brady, Wire Wrap Label (or equivalent)	1
5	FIT-221	Heat Shrink, Alpha Fit, (or equivalent)	AR
4	FIT-321	Heat Shrink, Alpha Fit, adhesive (or equivalent)	AR
3	MWDM2L-51S-4K1-36B	Glenair, Connector, 51 pos socket 36" long	1
2	104505-5	AMP MTE Male Contacts 22-26 AWG	5
1	103653-5	AMP MTE 6-Position Male Housing	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .X = +/- 0.5 .XX = +/- 0.20		DESCRIPTION Cable, TASE 51 Position Programming	
DRAWN BY	Rachel Smith	SIZE	B
DATE	08/10/2011	PART NUMBER	500-03165-00
		PART REV.	B01
		SCALE:	NONE
			SHEET 1 OF 1