



- Notes:**
- 1) Attach J2 and J3 together (mechanism is part of connectors) with contacts oriented as shown.
 - 2) Place label on wire 1" from end of wire with the corresponding connector name (i.e. Left Aileron, Elevator).
 - 3) Add label to J1 surface with <CCT Part Number> - <Rev>.

- Connector Info:**
- J2 - Anderson Power Products
Conn PN - 1327
Contact PN - 1332
 - J3 - Anderson Power Products
Conn PN - 1327G6
Contact PN - 1332
 - J5 - AMP
Conn PN - 205203-3
Socket PN - 745253-6
 - J4, J6, J7, J8, J9, J10
Housing - Maxx Products PN 4401
Sleeve - Maxx Products PN 4123
Contact - Berg PN 48116-000
 - P1 - AMP
Conn PN - 103653-5
Pin PN - 104505-5
 - P2 - AMP
Conn PN 103653-2
Pin PN 104505-5
 - P3 - AMP
Conn PN 104257-2
Socket PN 104480-8
 - P4 - AMP
Conn PN 103653-3
Pin PN 104505-5



MicroD 37 Position Receptacle, 24 awg pigtails
CCT PN 760-01085
Glenair PN MWDM2L-37S-4K1-36B

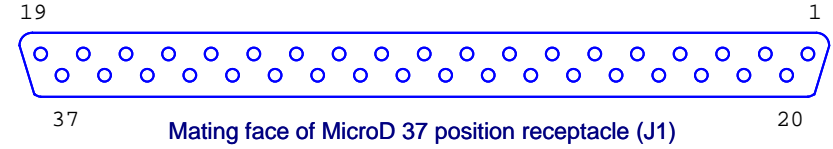

REVISION HISTORY			
REV	DATE	UPDATE	INIT
A	5/6/06	Initial Version	ST

Cloud Cap Technology Inc		
Title Piccolo LT Interface Cable		
Size B	Document Number 500-01152-00	Rev A
Date: Tuesday, June 27, 2006	Sheet	1 of 1